

# AutoVoice BR-200 Microphone command console System components APS-308 / APS-316 / APS-324

**Programmable digital microphone command console for bi-directional bus communication.**

**A new series of "intelligent", digital microphone command consoles, with all key functions programmed as required.**

**Bi-directional data bus for data communication (providing substantially lower installation costs).**

**Parallel connection of up to 30 digital microphone consoles on 4-phase system cable (GZ-928).**

**Can be expanded with a LED unit for indicating up to 8 programmable information inputs (refer to Special Functions).**

**Label fields for marking the individual functions - extremely user-friendly and error-free operation.**

**Modular expansion:**

- Units with 8 freely programmable keys with LED (max. 64, APS-364).


**Extra:**

- Modular expansion with LED unit for indicating up to 8 programmable information inputs (APS-309, APS-317, APS-325 etc.)



**Technical specifications**

<b>APS-3xx</b>	
Microphone	Capacitor microphone on swan-neck extension
NF output	Bus with galvanic-isolated transformer
Output level	0 dBm (775 mV)
Volume and tone	Adjusted from underside of console using a screwdriver
Output impedance	600Ohm
Connecting pattern	Symmetrical
Functions/priorities	In accordance with APS-99 programming
Keys	Max. 64 (with max. number LED indicator units, max. 56)
<b>LED-indicators:</b>	
Red	System in use (higher priority active)
Yellow	Gong activated (extra) or lower priority active
Green	System open (ready for talking)
Extra LED	Expansion with LED unit for indicating up to 8 info.inputs (extra)

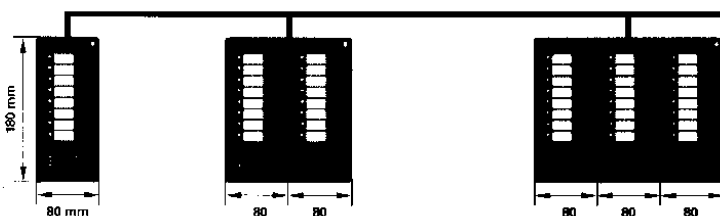

**Bidirectional BUS line to central-system (GZ-928)**



Article number	Description
BRG-APS308	Programmable digital microphone command console for bi-directional bus communication, with 8 keys, 7 programmable
BRG-APS316	As APS-308 with 16 keys, 15 programmable
BRG-APS324	As APS-308 with 24 keys, 23 programmable
BRG-APS332	As APS-308 with 32 keys, 31 programmable

Artikkelnummer	Beskrivelse
BRG-APS340	As APS-308 with 40 keys, 39 programmable
BRG-APS348	As APS-308 with 48 keys, 47 programmable
BRG-APS356	As APS-308 with 56 keys, 55 programmable
BRG-APS364	As APS-308 with 64 keys, 63 programmable

**APS-308/316/324**

