

4-channel technology and I<sup>2</sup>C BUS-logic.

Input module for Mic/Aux or external sound source.

Including preamplifier.

### APS-01 - Universal input module with preamplifier MIC / AUX

- The microphone's sensitivity is optional.
- The AUX/Line's sensitivity is optional.
- External input/output from the control panels and priority-activating from auxiliary contact switch.
- RWS-01 module accessory with 3-phase XLR socket and 5-phase DIN socket (rear).
- Separate volume, bass and treble controls on the front.
- Module can be used as an input source from APS-40 or autonomic (selected on module).
- Operating keys may be removed (using pliers) as required. Unit is then operated using a screwdriver (to avoid changing settings accidentally).

### APS-02 - Input module for music sources, with preamplifier

- External input/output from the control panels and priority-activating from auxiliary contact switch.
- RWS-02 module with 5-phase DIN socket (rear).
- Separate volume, bass and treble controls on the front.
- Module can be used as an input source from APS-40 or autonomic (selected on module).
- Operating keys may be removed (using pliers) as required. Unit is then operated using a screwdriver (to avoid changing settings accidentally).




### Technical specifications


<b>APS-01</b>	
Input (select on module)	Microphone / Line / Aux.
Input sensitivity, microphone	-63 / -53 dBm sym 200 ohm (can be disconnected).
Input impedance, microphone	200 Ohm.
Phantom feed, microphone	12V (can be connected on microphone).
Input sensitivity, Line/Aux.	-10/0 dBm (can be disconnected).
Input impedance, Line/Aux	47 kOhm.
Connection	Symmetrical or asymmetrical
Remote control (extra)	Input/output from amplifier banks and/or priority/bypass (VRS)
Activation of remote control	Externally closed contact between pin 4 and pin 2 to the 5-phase DIN socket
<b>APS-02</b>	
Input	Aux, mono (left and right together)
Input sensitivity	-10dBm (245 mV)
Input impedance	47 kOhm
Connection	Asymmetrical
Output	Aux, mono, -10dBm (245 mV) for recording
Recording	from NF channels 1-4 (selected on module)

Article number	Description
BRG-APS01	Universal input module with preamplifier for MIC / AUX
BRG-APS02	Input module for music sources, with preamplifier

**APS-01**

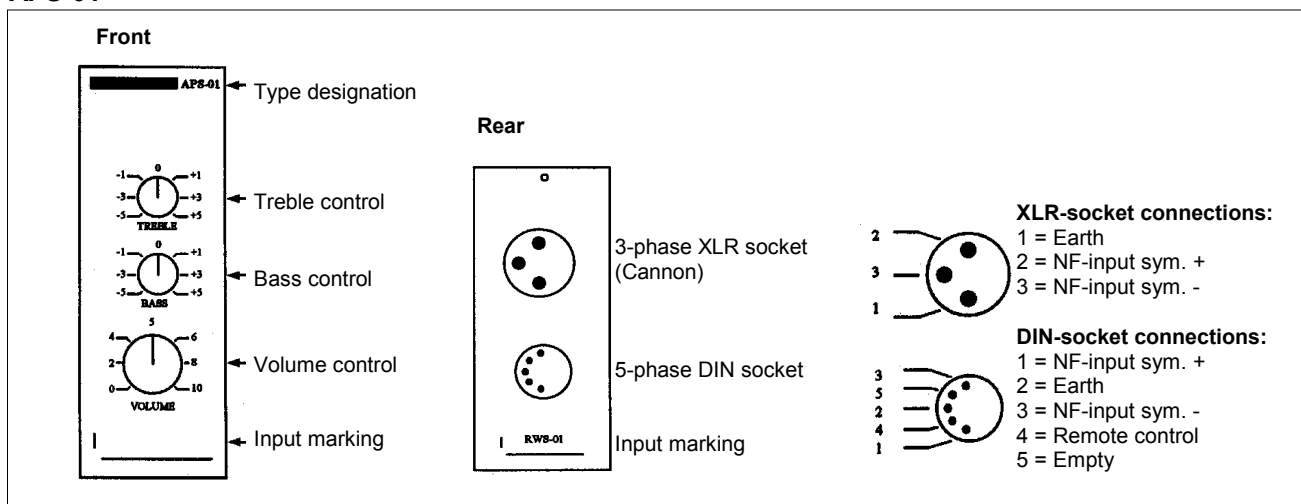

**APS-02**

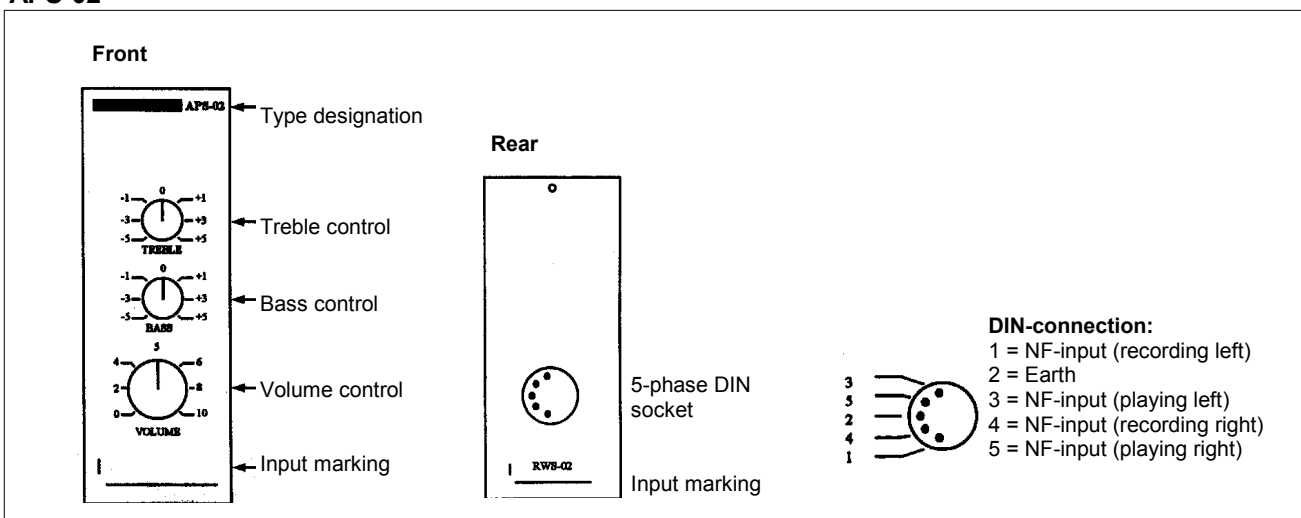

Autronica Fire and Security AS

Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01.

Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 49.

Autronica Industrial Ltd., Watford, United Kingdom. Phone: 1923 23 37 68, fax: 1923 22 55 77.

[www.autronicafire.no](http://www.autronicafire.no)