

Manual call point with SelfVerify - BF-503/EX

Interactive fire detection systems
Product datasheet

Declaration of conformity and instructions

Features

- Pushbutton unit for use in harsh environmental conditions
- Weather proof
- Corrosion resistant GRP
- Protection degree IP66 and IP67
- Short circuit isolator in each unit
- Automatic addressing
- Proven technology
- With SelfVerify function for reduced maintenance/testing and increased reliability
- Designed to meet the requirement of the major maritime classification societies

Applications

BF-503/EX is a manual call point for use in hazardous area zone 0, 1 or 2. It must be connected to the approved barrier BZ-500. The call point has been designed for use with Autronica's interactive fire detection systems, and comprises the SelfVerify function. This function ensures the highest grade of reliability and the lowest degree of manual testing, because all units comprising this function are automatically self-tested once every 24 hours.

The high IP degree and mechanical strength of the enclosure makes the call point suitable for outdoor applications in industrial, maritime and offshore installations.

The call point must be installed according to local regulations, which normally means along escape routes, landings and exits.

Principle

Lift flaps and push the alarm button.
Reset by means of reset key.

SelfVerify: the call point's ability to initiate alarms is regularly checked.



Versions

- | | |
|------------------|---|
| ■ BF-503/EX/0100 | Manual call point with SelfVerify. Exia version for use in all zones. |
| ■ BF-503/EX/0200 | CO2 release station with SelfVerify. Exia version for use in all zones. |
| ■ BF-503/EX/0300 | Release station with SelfVerify. Exia version for use in all zones. |
| ■ BF-503/EX/0400 | Release station with SelfVerify. Exia version for use in all zones. |
| ■ BF-503/EX/0500 | Release station with SelfVerify. Exia version for use in all zones. |
| ■ BF-503/N/0100* | Manual call point with SelfVerify. Exn version for use in zone 2. |
| ■ BF-503/N/0200* | CO2 release station with SelfVerify. Exn version for use in zone 2. |
| ■ BF-503/N/0300* | Release station with SelfVerify. Exn version for use in zone 2. |
| ■ BF-503/N/0400* | Release station with SelfVerify. Exn version for use in zone 2. |
| ■ BF-503/N/0500* | Release station with SelfVerify. Exn version for use in zone 2. |

* See separate datasheet

Schedule Drawing

No modifications permitted
without reference to the
Notified Body

Technical specifications	
Weight	1,2 kg
Material	Glass reinforced polyester
Colour	See description below
Voltage	10 - 27 VDC
Current consumption Stand by:	0,3 mA
Environm. requirement	EN 54
Degree of protection	IP66 and IP67
Working temperature	- 20 - + 70 °C
Storage temperature	- 55 - + 70 °C
Cable inlets	2 x M20
Maintenance	None
Service	Replace if faulty
Certificate	See website
Notified body	Nemko-Oslo-Norway ID No. 0470
Type examination certificate	NEMKO 03ATEX218X IECEx NEM 11.0009X
Directives and standards	94/9/EC (ATEX) IEC 60079-0:2007 IEC 60079-11:2006 IEC 60079-26:2006 EN 60079-0:2009 EN 60079-11:2007 EN 60079-26:2007 2004/108/EC (EMC) Emission: EN 50081-1:1992 Immunity: EN 50130-4:1995 EN 61000-6-2:1999
Ex parameters	II 1G Ex ia IIC T5 Ga Ui = 15,75V Ii = 63,5mA Ci = 21,6nF Li = 0 Pi = 0,44W

Part number	Description
116-BF-503/EX/0100	Manual call point, red
116-BF-503/EX/0200	CO ₂ release station, yellow
116-KIT-BF-503/EX/0300	Release station, yellow*
116-KIT-BF-503/EX/0400	Release station, green*
116-KIT-BF-503/EX/0500	Release station, blue*

* Duty label according to E-2327


Managing director Mr Frode Lund

AUTRONICA FIRE AND SECURITY AS

Head office, NO-7483 Trondheim, Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com

Connections

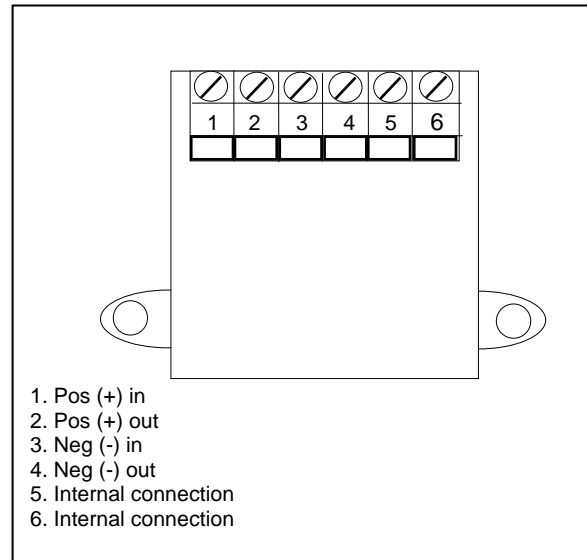

Dimensions

