

8-2



FEATURES:

- Exceptional effective non-toxic fire extinguishing agent
- Uniquely easy to install and maintain
- Approved by EPA for SNAP listing
- Ecologically safe and environmentally friendly (O.D.P.=0, G.W.P.=0)
- Very cost efficient

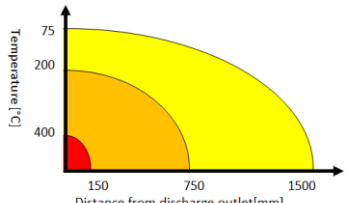
Description

DSPA aerosol generators can be used as a part of a highly effective fixed extinguishing system. A DSPA generator is non-pressurized and is installed inside a room or compartment that requires protection. After activation, an aerosol cloud is generated, which expands volumetrically, flooding the space and extinguishing the fire. The DSPA generators are mainly designed to use in normally unoccupied and unoccupied areas and are effective on class A, B, C fires.

Application

The DSPA generator 8-2 is recommended for the protection of large compartments, such as storage rooms, archives, technical rooms and server rooms.

Specifications

Model	8-2
Part Number	DSPA-ART00010
Dimensions	350 x 220 mm
Total weight	18000 g
Compound weight	6700 g
Volume coverage	53 - 154 m ³
Discharge time	140 sec
Activation, current	Screw-in starter, 1.3A
Operation conditions	-40°C to 54°C/ Up to 95% RH at 54°C
Colour	Standard RAL 3000, other colours upon request
Min. distance for persons(75°C) from discharge outlet	
Min. distance for combustible material(200°C) from discharge outlet	
Min. distance for construction structures(400°C) from discharge outlet	

More information:

DSPA.nl

Postbus 6572

6503 GB Nijmegen

The Netherlands

T. +31 (0) 24 35 22 573

F. +31 (0) 24 37 87 583

E info@dspa.nl



Datasheet: DSPA GENERATOR

Serie: 8-2

Version: 1.2

Date: 15-10-2012